
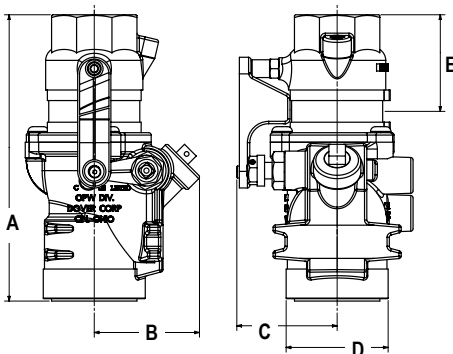


10 Plus Series Emergency Shut-Off Valves

OPW raised the protection standard in emergency valves when it introduced the first double-poppet valve back in 1989. This industry-changing OPW innovation helped to *significantly reduce the risk of fire, explosion, personal injury, property damage and environmental contamination* at sites around the world. **Major oil companies and jobbers agreed that providing added protection for their customers, investments and the environment were the three most convincing reasons for switching to the innovative new valves.**

Dimensions

| | in. | cm |
|---|---------------------------------|----|
| A | 7 ⁹ / ₁₆ | 4 |
| B | 2 ²⁵ / ₃₂ | 4 |
| C | 2 ²¹ / ₃₂ | 4 |
| D | 2 ¹¹ / ₁₆ | 4 |
| E | 2 ⁹ / ₁₆ | 4 |
| F | 4 ²¹ / ₃₂ | 4 |



Materials

Top: Cast iron

Body: Cast iron

10 PLUS



Features

- ◆ The ONLY emergency shut-off valve in the world designed to protect your customers, investments, and the environment against the potential hazards of undetected shear groove leaks caused by low-impact incidents.
- ◆ The patent-pending SmartGuard™ design contains shear groove leaks, preventing fuel from leaking into sumps to help reduce the risk of fire, explosion, personal injury, property damage, environmental contamination, product loss and costly clean-up.
- ◆ Superior shear groove design and engineering results in reliable valve shut-off in the event of a pull-over or dislodged dispenser. The 10 Plus utilizes the same time-tested field-proven design of the OPW 10 Series Emergency Shut-off Valve – the most specified emergency shut-off valve in the world.
- ◆ Fusible link releases to automatically close the valve to reduce fire hazard.
- ◆ Rigorously tested to meet OPW's rigid quality standards.

Ordering Specifications

| Model No. | Body Size | | Body Weight | | Connection Threads | Poppet Configuration | Application | Mounting System |
|-------------------------------|-----------|----|-------------|------|--------------------|----------------------|-------------|-----------------|
| | in. | cm | lb. | kg | | | | |
| 10P-0150 | 1 1/2 | 4 | 6.7 | 3.05 | NPT | Single | Pressure | Combination |
| 10P-0152 | 1 1/2 | 4 | 6.8 | 3.10 | NPT | Double | Pressure | Combination |
| NEW E85 10P-0152E85 | 1 1/2 | 4 | 6.8 | 3.10 | NPT | Double | Pressure | Combination |



10 Plus Replacement Parts

| Part Number | Description |
|--------------|---------------------------------------|
| 10RPLUS-0150 | 10 Plus Single Poppet Replacement Top |
| 10RPLUS-0152 | 10 Plus Double Poppet Replacement Top |
| 202950 | Tetraseal |
| 200143 | Safety Hub/Fusible Link |

Listings and Certifications



10 Plus Series Instruction Sheet Order
Number: 201614